

DreamJet Slide Shower VDRM04

Congratulations on your purchase of this high quality product from Voda Plumbingware. Please read the following before installation and retain (along with your receipt).

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 50kPa

Maximum operating Pressure = 500kPa* (As per NZ Building Code AS/NZ 3500.1)

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION


Mains Pressure systems Install as supplied.

Unequal Low systems First remove the flow restrictor disc from inside the screw end of the handpiece.

Equal Low systems First remove the flow restrictor disc from inside the screw end of the handpiece.

CONTENTS

- Rail with adjuster/holder
- Wall brackets and covers
- Fixing kit
- 1.5m supply hose
- Supply elbow
- Shower handpiece
- Flow restrictor for Mains Pressure installation

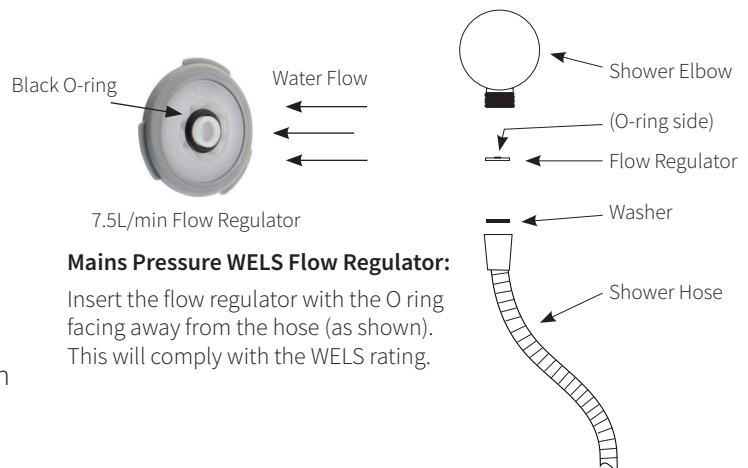

Mains Pressure WELS Flow Regulator:


Insert the flow regulator with the O ring facing away from the hose (as shown). This will comply with the WELS rating.



INSTALLATION

***FOR PRESSURES EXCEEDING 500kPa INSTALL A PRESSURE REDUCING VALVE. THOROUGHLY FLUSH ALL PIPES TO ELIMINATE ANY REMAINING DIRT AND RESIDUE, AND INSTALL INLINE FILTERS. FAILURE TO DO SO MAY VOID THE WARRANTY. TO BE INSTALLED AS PER THE REQUIREMENTS WITH AS/NZS 3500.**

See steps on the next page.

If installing on Low or Unequal water pressure systems - please remove the flow restrictor disc for optimal flow.

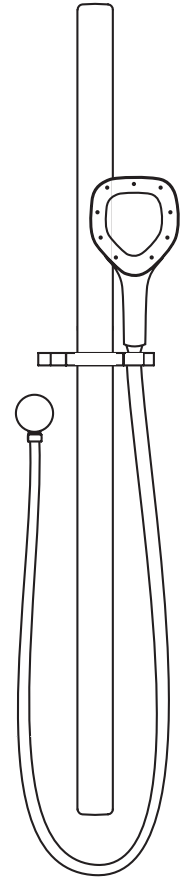


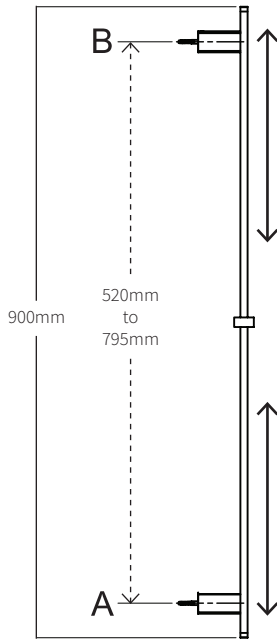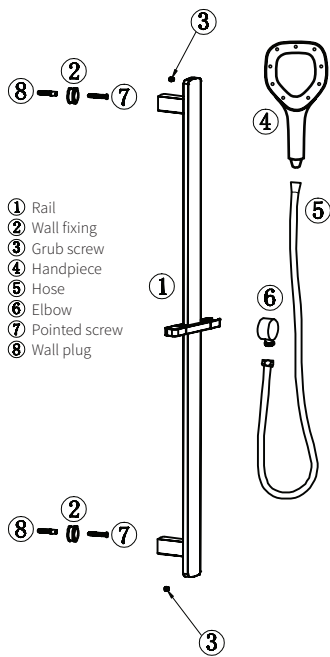

ATTACH PROOF OF PURCHASE HERE

1. Measure and mark hole positions (at points A and B) with a pencil at the required distance (max. 795mm apart).
2. Drill two mounting holes where you have marked.
3. Fit the wall fixing parts into the drilled holes.
4. Push the rail bracket onto the wall fixings, then tighten the grub screws.
5. Fix the elbow to the wall.
6. Attach hose to elbow and handpiece then insert shower handpiece into holder.

Wall brackets can be adjusted to achieve desired height.

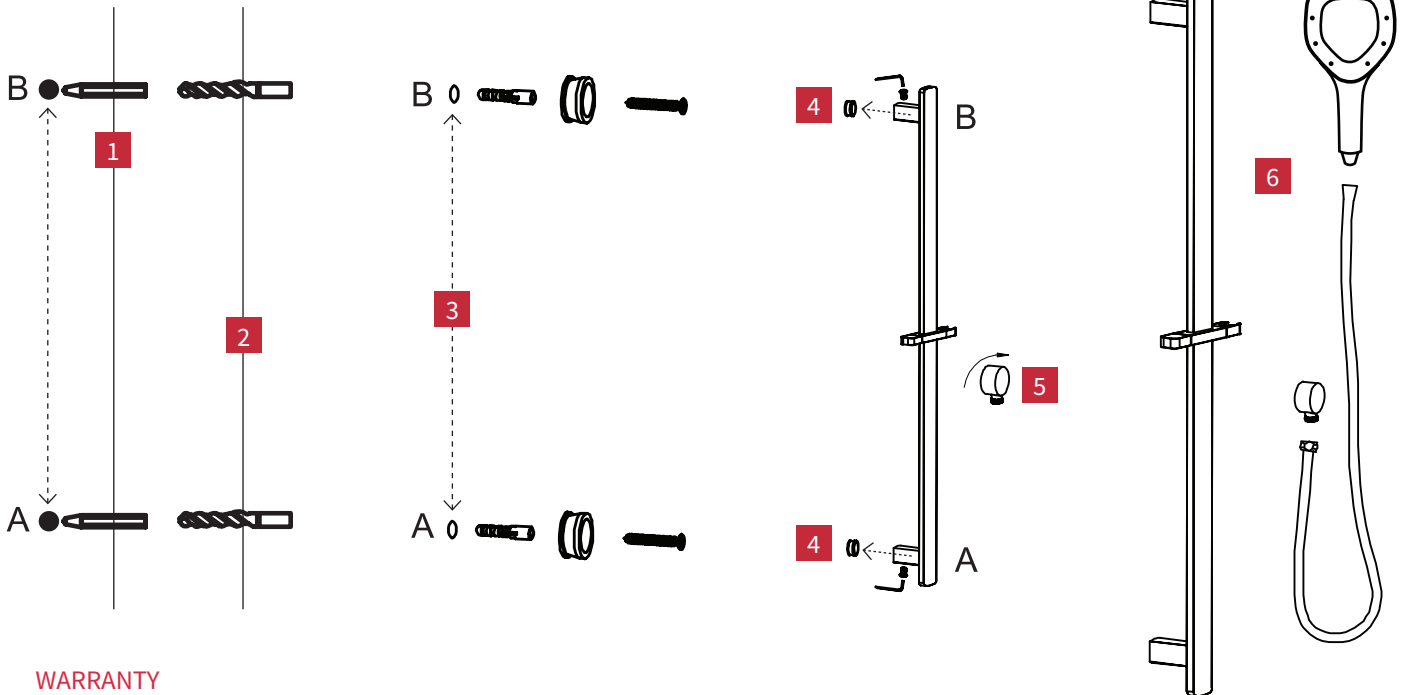

WARRANTY

PLEASE CALL US BEFORE REMOVING OR UNDERTAKING ANY REPAIR WORK.

Please refer to our website for warranty information: www.vodaplumbingware.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

SHOULD NOT BE CLEANED WITH ACIDIC, CAUSTIC/ALKALINE, ABRASIVE OR CITRIC CLEANERS.

A soft, damp cloth is recommended for cleaning (Not a Micro fibre cloth). Mild soap solutions can also be used on occasion.

See website for full care instructions: www.vodaplumbingware.co.nz/tapware-care-instructions/